



**DYNAMIC
SCREENS**
Australia

Why Choose Us

Perth Australia Based family Company with over 32 years in the AV industry. Now we bring you the latest Technology in LED screens and 4K video matrix over optical fibre.

Dynamic Screens Australia.

For Hire or For sales, we have a Solution for you. Please contact our friendly staff who are here to help in any project, big or Small.

Tony: 0405622775

tony@dynamiccreens.com.au

www.dynamiccreens.com.au

RA Series LED Cabinet



Indoor Specs.

| Model | IRA-3.9 | IRA-4.8 |
|--------------------|-------------------|-------------------|
| Pixel Pitch | 3.91mm | 4.81mm |
| LED Encapsulation | SMD2020 | SMD2020 |
| Cabinet Resolution | 128x128dots | 104x104dots |
| Brightness | >1,200nits | >1,200nits |
| Viewing Angle | H:160 ° V:140 ° | H:160 ° V:140 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 500x500mm | 500x500mm |
| Voltage | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al |



RA Series LED Cabinet

Outdoor Specs.

| Model | ORA-3.9 | ORA-4.8 |
|--------------------|-------------------|-------------------|
| Pixel Pitch | 3.91mm | 4.81mm |
| LED Encapsulation | SMD1921 | SMD1921 |
| Cabinet Resolution | 128x128dots | 104x104dots |
| Brightness | >5,000nits | >5,000nits |
| Viewing Angle | H:160 ° V:140 ° | H:160 ° V:140 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 500x500mm | 500x500mm |
| Waterproof | Front: IP65 | Front: IP65 |
| Voltage | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al |



Main Features

High ROI Choice


Double Size Available

RA series cabinet that is a cost-effective, high-performance solution looking for crystal clear resolution with a range of dynamic flexibility. RA series cabinet uses high-performance, flicker-free LED's to deliver HD clarity in a wide range of touring and permanent install applications.

RE Series LED Cabinet



**DYNAMIC
SCREENS**
Australia

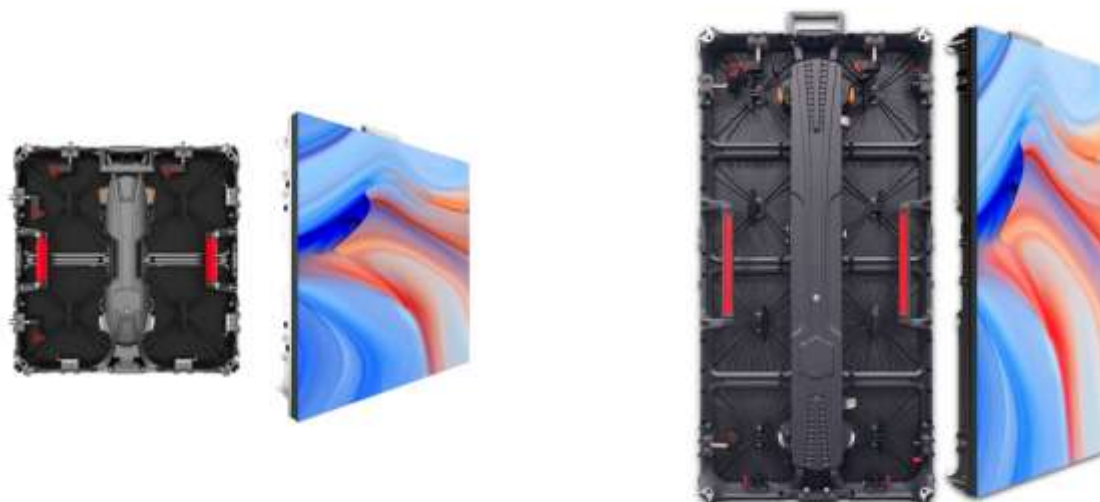

Indoor Specs.

| Model | IRE-2.6 | IRE-2.9 | IRE-3.9 |
|--------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 2.604mm | 2.976mm | 3.91mm |
| LED Encapsulation | SMD1515 | SMD1515 | SMD2020 |
| Cabinet Resolution | 192x192dots | 168x168dots | 128x128dots |
| Brightness | >800nits | >800nits | >1,200nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | H:160 ° V:140 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 500x500mm | 500x500mm | 500x500mm |
| Voltage | 120-240V | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al | Die-casting Al |



RE Series LED Cabinet

Outdoor Specs.

| Model | ORE-3.9 | ORE-4.8 |
|--------------------|-------------------|-------------------|
| Pixel Pitch | 3.91mm | 4.81mm |
| LED Encapsulation | SMD1921 | SMD1921 |
| Cabinet Resolution | 128x128dots | 104x104dots |
| Brightness | >5,000nits | >5,000nits |
| Viewing Angle | H:160 ° V:140 ° | H:160 ° V:140 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 500x500mm | 500x500mm |
| Waterproof | Front: IP65 | Front: IP65 |
| Voltage | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al |



Main Features

Cost-Effective Performance & Function

Designed for exceptional ROI, Double Size available

RE series cabinet that is a cost-effective, high-performance solution looking for crystal clear resolution with a range of dynamic flexibility. It uses high-performance, flicker-free LED's to deliver HD clarity in a wide range of touring and permanent install applications. And front-serviceable for easy user-level serviceability and features high-contrast black-body LEDs with a 3,840hz refresh rate for exceptional performance in-person and on-camera.

RK Series LED Cabinet



**DYNAMIC
SCREENS**
Australia



Indoor Specs.

| Model | IRK-1.9 | IRK-2.6 | IRK-2.9 |
|--------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 1.95mm | 2.604mm | 2.976mm |
| LED Encapsulation | SMD1515 | SMD2020 | SMD2020 |
| Cabinet Resolution | 256x256dots | 192x192dots | 168x168dots |
| Brightness | >800nits | >1,200nits | >1,200nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 500x500mm | 500x500mm | 500x500mm |
| Voltage | 120-240V | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al | Die-casting Al |



RK Series LED Cabinet

Outdoor Specs.

| Model | ORK-3.9 | ORK-4.8 |
|--------------------|-------------------|-------------------|
| Pixel Pitch | 3.91mm | 4.81mm |
| LED Encapsulation | SMD1921 | SMD1921 |
| Cabinet Resolution | 128x128dots | 104x104dots |
| Brightness | >5,000nits | >5,000nits |
| Viewing Angle | H:160 ° V:140 ° | H:160 ° V:140 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 500x500mm | 500x500mm |
| Waterproof | Front: IP65 | Front: IP65 |
| Voltage | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al |



Main Features

Ultra-resolution Standards

Double Size Available

RK series cabinet is a ultrah-resolution LED Video Wall Panel that offers a stunning picture at close distances. RK series cabinet serves well in close viewing distances and camera environments by providing a high pixel density that delivers increased content detail. RK series cabinet is designed to deliver high-contrast imagery with advanced 16bit + color processing and a standard 3,840+ Hz refresh rate for exceptional on-camera performance, clarity, and fluid image movements. Its modular, robust design and functional feature set make NEW RK series cabinet exceed the standards for ultra-resolution LED displays.

CW Series LED Cabinet




**DYNAMIC
SCREENS**
Australia



| Model | CW-3.9 | CW-7.8 |
|--------------------|-------------------|-------------------|
| Pixel Pitch | 3.9-7.8mm | 7.8-7.8mm |
| LED Encapsulation | SMD1921 | SMD3535 |
| Cabinet Resolution | 256x64dots | 128x64dots |
| Brightness | >5,000nits | >5,000nits |
| Viewing Angle | H:160 ° V:140 ° | H:160 ° V:140 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 1,000x500mm | 1,000x500mm |
| Voltage | 120-240V | 120-240V |
| Cabinet Material | Al Profile | Al Profile |



DM Series LED Cabinet

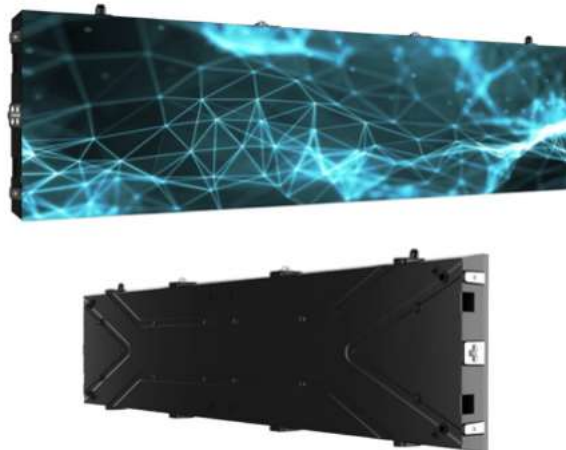

| Model | DM-2.6 | DM-2.9 | DM-3.9 |
|--------------------|-----------------|-----------------|-----------------|
| Pixel Pitch | 2.604mm | 2.976mm | 3.91mm |
| LED Encapsulation | SMD1515 | SMD1515 | SMD2020 |
| Cabinet Resolution | 384x96dots | 336x84dots | 256x64dots |
| Brightness | >800nits | >800nits | >1,200nits |
| Viewing Angle | 160° H 140° V | 160° H 140° V | H:160° V:140° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 1,000x250mm | 1,000x250mm | 1,000x250mm |
| Voltage | 120-240V | 120-240V | 120-240V |
| Cabinet Material | Die-casting Al | Die-casting Al | Die-casting Al |



ViuPad Series LED Cabinet



| Model | ViuPad-1.2 | ViuPad-1.5 | ViuPad-1.5 | ViuPad-1.8 |
|--------------------|-------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 1.25mm | 1.53mm | 1.66mm | 1.86mm |
| LED Encapsulation | SMD1010 | SMD1212 | SMD1212 | SMD1515 |
| Cabinet Resolution | 512x384dots | 415x312dots | 384x288dots | 344x258dots |
| Brightness | >500nits | >500nits | >500nits | >800nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit + | 16 Bit + | 16 Bit + | 16 Bit + |
| Panel Size | 640x480mm | 640x480mm | 640x480mm | 640x480mm |
| Cabinet Material | Die-cast Al | Die-cast Al | Die-cast Al | Die-cast Al |
| Cabinet Weight | 7.5kg | 7.5kg | 7.5kg | 7.5kg |
| Certificate | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS |
| Warranty | 2 Full Years | 2 Full Years | 2 Full Years | 2 Full Years |



ViuTV Series LED Cabinet



| Model | ViuTV-0.9 | ViuTV-1.2 | ViuTV-1.5 | ViuTV-1.8 |
|--------------------|-------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 0.93mm | 1.25mm | 1.56mm | 1.875mm |
| LED Encapsulation | IMD-09 | SMD1010 | SMD1212 | SMD1515 |
| Cabinet Resolution | 640x360dots | 480x270dots | 384x216dots | 320x180dots |
| Brightness | >500nits | >500nits | >500nits | >800nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit + | 16 Bit + | 16 Bit + | 16 Bit + |
| Panel Size | 600x337.5mm | 600x337.5mm | 600x337.5mm | 600x337.5mm |
| Cabinet Material | Die-cast Al | Die-cast Al | Die-cast Al | Die-cast Al |
| Cabinet Weight | 7.5kg | 7.5kg | 7.5kg | 7.5kg |
| Certificate | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS |
| Warranty | 2 Full Years | 2 Full Years | 2 Full Years | 2 Full Years |



Poster LED Display



| Model | Poster-1.8 | Poster-2 | Poster-2.5 | Poster-3 |
|--------------------|-------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 1.86mm | 2mm | 2.5mm | 3.076mm |
| LED Encapsulation | SMD1515 | SMD1515 | SMD2121 | SMD2121 |
| Cabinet Resolution | 344x1,032dots | 320x960dots | 256x768dots | 208x624dots |
| Brightness | >800nits | >800nits | >1,200nits | >1,200nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Contrast Rate | 5000:1 | 5000:1 | 5000:1 | 5000:1 |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 640x1,920mm | 640x1,920mm | 640x1,920mm | 640x1,920mm |
| Cabinet Material | Al Profile | Al Profile | Al Profile | Al Profile |
| Cabinet Weight | 45kg | 45kg | 45kg | 45kg |
| Certificate | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS |
| Warranty | 2 Full Years | 2 Full Years | 2 Full Years | 2 Full Years |



Dance Floor LED Display



| Model | DF-3 | DF-4 | DF-6 |
|--------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 3.91mm | 4.81mm | 6.25mm |
| LED Encapsulation | SMD1415 | SMD1921 | SMD2727 |
| Cabinet Resolution | 256x128dots | 208x104dots | 160x80dots |
| Brightness | >4,500nits | >5,000nits | >5,500nits |
| Viewing Angle | 140 ° H 120 ° V | 140 ° H 120 ° V | H:140 ° V:120 ° |
| Refresh Rate | 3,840Hz +/- | 3,840Hz +/- | 3,840Hz +/- |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 1,000x500mm | 1,000x500mm | 1,000x500mm |
| Voltage | 120-240V | 120-240V | 120-240V |
| Cabinet Material | Iron | Iron | Iron |



OFC Series LED Display



| Model | OFC-4 | OFC-5 | OFC-8 | OFC-10 |
|--------------------|-------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 4mm | 5mm | 8mm | 10mm |
| LED Encapsulation | SMD1921 | SMD1921 | SMD3535 | SMD3535 |
| Cabinet Resolution | 240x240dots | 192x192dots | 120x120dots | 96x96dots |
| Brightness | >5,000nits | >5,000nits | >6,500nits | >6,500nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Refresh Rate | 1,920Hz + | 1,920Hz + | 1,920Hz + | 1,920Hz + |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 960x960mm | 960x960mm | 960x960mm | 960x960mm |
| Cabinet Material | Iron/Al | Iron/Al | Iron/Al | Iron/Al |
| Cabinet Weight | 40kg | 40kg | 40kg | 40kg |
| Certificate | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS |
| Warranty | 2 Full Years | 2 Full Years | 2 Full Years | 2 Full Years |




MA Series LED Display



| Model | MA-4 | MA-5 | MA-8 | MA-10 |
|--------------------|-------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 4mm | 5mm | 8mm | 10mm |
| LED Encapsulation | SMD1921 | SMD1921 | SMD3535 | SMD3535 |
| Cabinet Resolution | 240x240dots | 192x192dots | 120x120dots | 96x96dots |
| Brightness | >5,000nits | >5,000nits | >6,500nits | >6,500nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Refresh Rate | 1,920Hz + | 1,920Hz + | 1,920Hz + | 1,920Hz + |
| Grayscale | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- | 16 Bit +/- |
| Panel Size | 960x960mm | 960x960mm | 960x960mm | 960x960mm |
| Cabinet Material | Die Casting Mg | Die Casting Mg | Die Casting Mg | Die Casting Mg |
| Cabinet Weight | 25kg | 25kg | 25kg | 25kg |
| Certificate | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS |
| Warranty | 2 Full Years | 2 Full Years | 2 Full Years | 2 Full Years |



Flexible LED Module

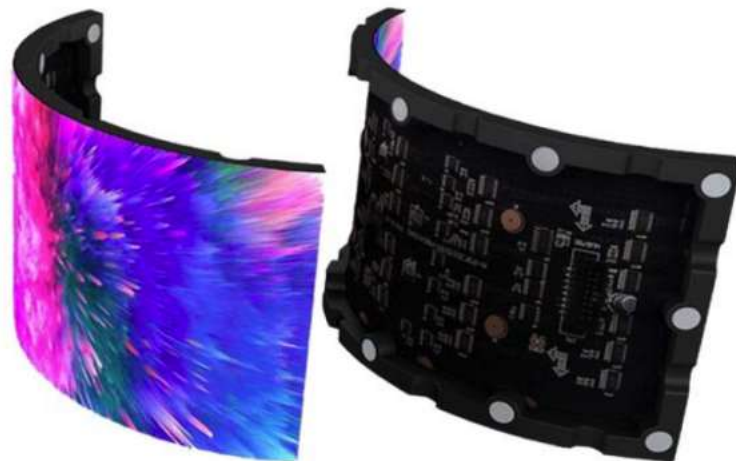

| Model | P1.875 | P2 | P2.5 | P3 |
|-------------------|-------------------|-------------------|-------------------|-------------------|
| Pixel Pitch | 1.875mm | 2mm | 2.5mm | 3mm |
| LED Encapsulation | SMD1010 | SMD1010 | SMD1010 | SMD1515 |
| Module Resolution | 128x64dots | 120x60dots | 120x120dots | 96x96dots |
| Module Size | 240x120mm | 240x120mm | 240x120mm | 240x120mm |
| Brightness | >600nits | >600nits | >600nits | >800nits |
| Viewing Angle | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V | 160 ° H 140 ° V |
| Drive Duty | 1/32s | 1/30s | 1/24s | 1/20s |
| Working Voltage | DC 5V | DC 5V | DC 5V | DC 5V |
| Certificate | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS | CE, FCC, RoHS |
| Warranty | 2 Full Years | 2 Full Years | 2 Full Years | 2 Full Years |



Why Choose Us

Perth Australia Based family Company with over 32 years in the AV industry. Now we bring you the latest Technology in LED screens and 4K video matrix over optical fibre.

Dynamic Screens Australia.

For Hire or For sales, we have a Solution for you. Please contact our friendly staff who are here to help in any project, big or Small.

Tony: 0405622775

tony@dynamiccreens.com.au

www.dynamiccreens.com.au



DYNAMIC SCREENS

Australia

